



Powered by:



GENERATING SET PERFORMANCE	50Hz	60Hz
VOLTAGE	V400	
PHASES	Three	
PRIME RATED POWER	2250kVA	
STANDBY RATED POWER	2500kVA	
POWER FACTOR	0.80 PF	
FUEL CONSUMPTION @ 75%	335L/hr	

The POWERGen Group Ltd:



**POWERGen Group Ltd**

**CONTACT**

Tel: + 64 7 543 1335  
 Fax: + 64 7 543 1346  
 Toll Free: **0800 679 800**

**STREET ADDRESS**

49 Whiore Avenue  
 Tauriko  
 Tauranga

**POSTAL ADDRESS**

PO Box 14254  
 Tauranga Mail Centre  
 3143 New Zealand

ENGINE	MTU	16V4000G63
PERFORMANCE	50Hz	60Hz
BASELOAD RATED POWER	TBA	
PRIME RATED POWER	1965KWm	
STANDBY RATED POWER	2185KWm	
FUEL CONSUMPTION	191g/KWh @ 100% 193g/KWh @ 75% 203g/KWh @ 50%	
TYPE	Diesel 4 stroke	
ASPIRATION	Turbocharged water charge air-cooling	
INJECTION TYPE	Direct injection	
ENGINE GOVERNOR	Electronic governing	
CYLINDERS AND ARRANGEMENT	16 Vee	
BORE x STROKE	170 x 210mm	
COMPRESSION RATIO	16.5 : 1	
ELECTRICAL SYSTEM VOLTAGE	24 volt	
BATTERY TYPE	Lead acid, 24V	
DERATING FOR TEMPERATURE	40 deg C	
DERATING FOR ALITUDE	1000mm	
DERATING FOR HUMIDITY	90%	

The POWERGen Group Ltd:



## ALTERNATOR

## STAMFORD

PERFORMANCE	50Hz	60Hz
MODEL	LV 804 W	
BASELOAD RATED POWER 40 deg C	3322kVA	
PRIME RATED POWER 40 deg C	3555kVA	
STANDBY RATED POWER 40 deg C	3800kVA	
STANDBY RATED POWER 27 deg C	3910kVA	
EFFICIENCY	96.5%	
STANDARD WINDING CONNECTIONS	Star Delta	
EXCITER	Separately excited by P.M.G	
POLES	4 poles	
PHASES	3 phases	
WIRES	6 leads	
VOLTAGE REGULATION	+/- 0.5%	
INSULATION CLASS	Class H	
ENCLOSURE	IP23	
MAXIMUM OVERSPEED	150%	
STANDARD AVR MODEL	MA330	
OPTIONAL AVR MODEL	TBA	
DERATING FOR TEMPERATURE	40 deg C	
DERATING FOR ALTITUDE	1000m	

The POWERGen Group Ltd:



## CONTACT

## STREET ADDRESS

## POSTAL ADDRESS

## DIMENSIONS AND CAPACITY


### STANDARD MODELS

	INTEGRATED FUEL TANK CAPACITY		WEIGHT	DIMENSIONS		
	STANDARD	OPTIONAL	KG	LENGTH	WIDTH	HEIGHT
OPEN SKID TYPE	N/A	N/A	21500kg	6500mm	2630mm	2800mm

## GENERATOR SET EQUIPMENT

### STANDARD MODELS

- Heavy duty steel base frame
- Pad type anti- vibration dampers
- Integrated fuel tank, base mounted
- 24V battery
- Key start switch
- Emergency stop button
- Silencer industrial type (open skid type)

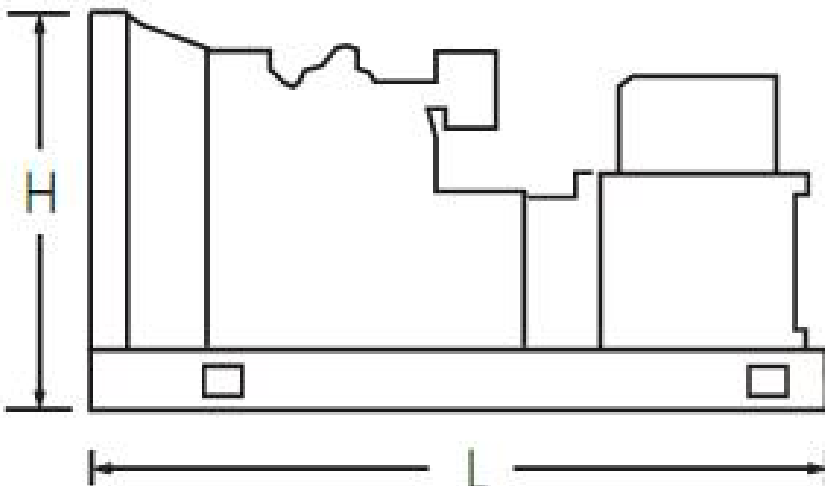

The POWERGen Group Ltd:



# DSE7320



## AUTOMATIC MODELS- EQUIPMENT

4 poles 3200ABB circuit breaker, electronic control unit DeepSea 5320, control panel box key, emergency stop button, water jacket heaters,

## AUTOMATIC MODELS- PROTECTORS

Low oil pressure, low fuel level, overload, over/ under frequency, unbalanced load, low voltage, over/ under battery voltage belt breakage, charge alternator fail, Independent earth fault trip.

## AUTOMATIC MODELS- INSTRUMENTATION

Voltmeter, ammeter (3 phases), frequency meter, hour meter, battery voltage meter, fuel level

The POWERGen Group Ltd:



**CONTACT**  
Tel: + 64 7 543 1336  
Fax: + 64 7 543 1346  
Toll Free: **0800 679 800**

**STREET ADDRESS**  
49 Whiore Avenue  
Tauriko  
Tauranga

**POSTAL ADDRESS**  
PO Box 14254  
Tauranga Mail Centre  
3143 New Zealand